




H2S-B1 Hydrogen Sulfide Sensor



PATENTED

Figure 1 H2S-B1 Schematic Diagram

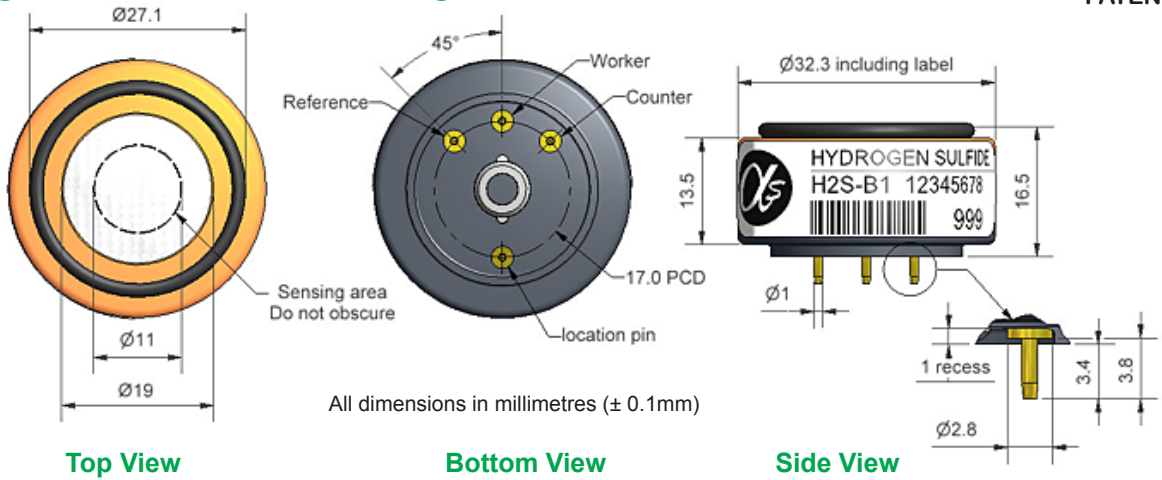

Technical Specification

| | | | |
|-----------------------------|---|--|------------|
| PERFORMANCE | Sensitivity | nA/ppm in 20ppm H ₂ S | 300 to 450 |
| | Response time | t ₉₀ (s) from zero to 20ppm H ₂ S | < 55 |
| | Zero current | ppm equivalent in zero air | ± 0.8 |
| | Resolution | RMS noise (ppm equivalent) | < 0.05 |
| | Range | ppm H ₂ S limit of performance warranty | 200 |
| | Linearity | ppm error at full scale, linear at zero and 20ppm H ₂ S | 1 to -5 |
| | Overgas limit | maximum ppm for stable response to gas pulse | 500 |
| LIFETIME | Zero drift | ppm equivalent change/year in lab air | < 0.05 |
| | Sensitivity drift | % change/year in lab air, monthly test | < 3 |
| | Operating life | months until 80% original signal (24 month warranted) | > 24 |
| ENVIRONMENTAL | Sensitivity @ -20°C | % (output @ -20°C/output @ 20°C) @ 20ppm | 80 to 92 |
| | Sensitivity @ 50°C | % (output @ 50°C/output @ 20°C) @ 20ppm | 100 to 110 |
| | Zero @ -20°C | ppm equivalent change from 20°C | < ± 0.5 |
| | Zero @ 50°C | ppm equivalent change from 20°C | < 0 to 1.5 |
| CROSS SENSITIVITY | NO ₂ sensitivity | % measured gas @ 10ppm | < -30 |
| | Cl ₂ sensitivity | % measured gas @ 10ppm | < -25 |
| | NO sensitivity | % measured gas @ 50ppm | < 35 |
| | SO ₂ sensitivity | % measured gas @ 20ppm | < 18 |
| | CO sensitivity | % measured gas @ 400ppm | < 3 |
| | H ₂ sensitivity | % measured gas @ 400ppm | < 0.5 |
| | C ₂ H ₄ sensitivity | % measured gas @ 400ppm | < 0.5 |
| | NH ₃ sensitivity | % measured gas @ 400ppm | < 0.1 |
| CO ₂ sensitivity | % measured gas @ 5% | < 0.1 | |
| KEY SPECIFICATIONS | Temperature range | °C | -30 to 50 |
| | Pressure range | kPa | 80 to 120 |
| | Humidity range | % rh | 15 to 90 |
| | Storage period | months @ 3 to 20°C (stored in sealed pot) | 6 |
| | Load resistor | Ω (recommended) | 10 to 47 |
| | Weight | g | < 13 |



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.



H2S-B1 Performance Data

Technical Specification

Figure 2 Sensitivity Temperature Dependence

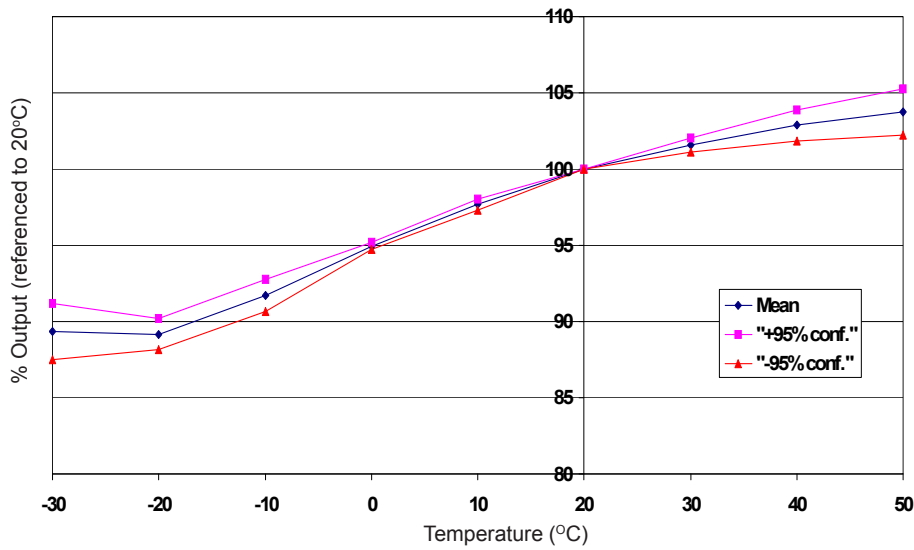


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors.

Figure 3 Zero Temperature Dependence


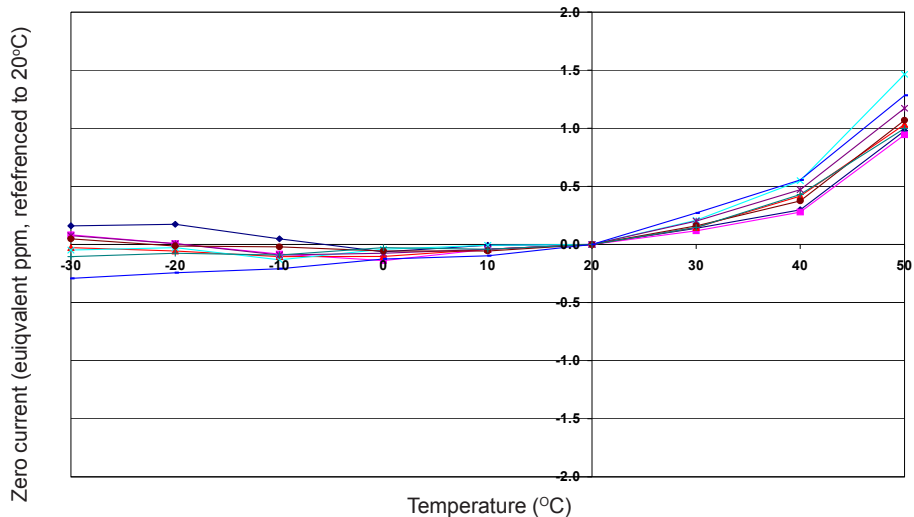


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

Figure 4 Response Time Temperature Dependence

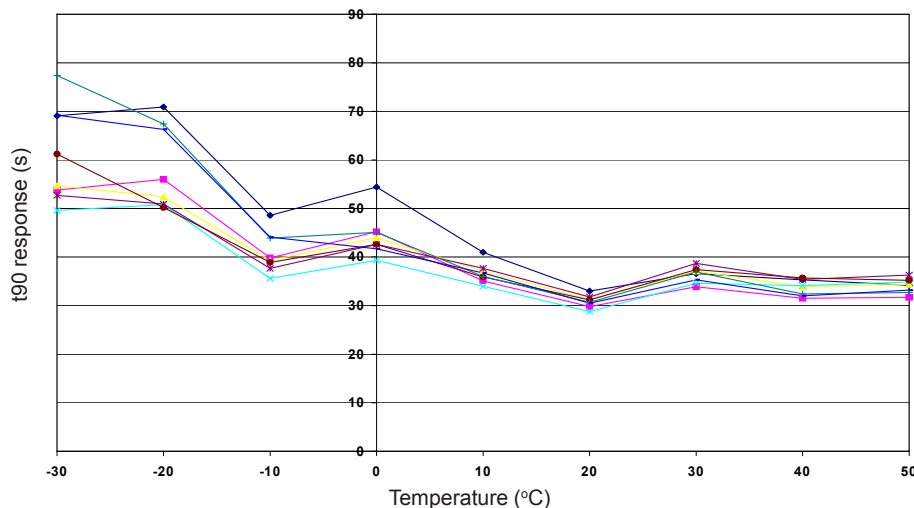

Electrochemical gas cells respond slower at lower temperatures.

Results are from a standard batch of sensors.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD) Doc. Ref. H2SB1/DEC15